

Observ-O-Scopes

a
11

REVISION
OCT. 92

SAFETY OBSERV-O-SCOPES

No. 0155: .5" (13mm) diameter quality lens. Adjustable for door thickness from 1.312" to 2.25" (33 to 57mm).


No. 0156: .5" (13mm) diameter quality lens. Adjustable for door thickness from 2.25" to 3.25" (57 to 83mm).

FEATURES: The exterior lens is constructed of a scientific glass to prohibit scratching while creating a field of vision exceeding 160°. All viewers are furnished with a shutter.

INSTALLATION: Drill a .5" (13mm) hole completely through the door; insert the lens portion into the exterior side and the slotted scope portion through the interior side. Tighten together with a slotted screwdriver or a coin.

PACKED: Individually poly-bagged, 10 in a box.

WEIGHT PER BOX: .6 lb. (.27kg)

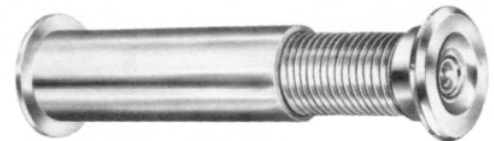

No. 0155 No. 0156

Knocker No. w/Scope	Scope No. For 1.75" Door	Scope No. For 1.75"-2.25" Door
0101	0156	0156
0103	0156	0156
0107	0156	0156
0111	0155	0156
0115	0155	0156
0117	0156	0156
0138 Series	0155	0156
0186	0156	0156

NOTE: Observ-o-scopes are unavailable for use with door knockers on doors exceeding 2.25" (57mm) in thickness.