




OVERHEAD CONCEALED CLOSERS

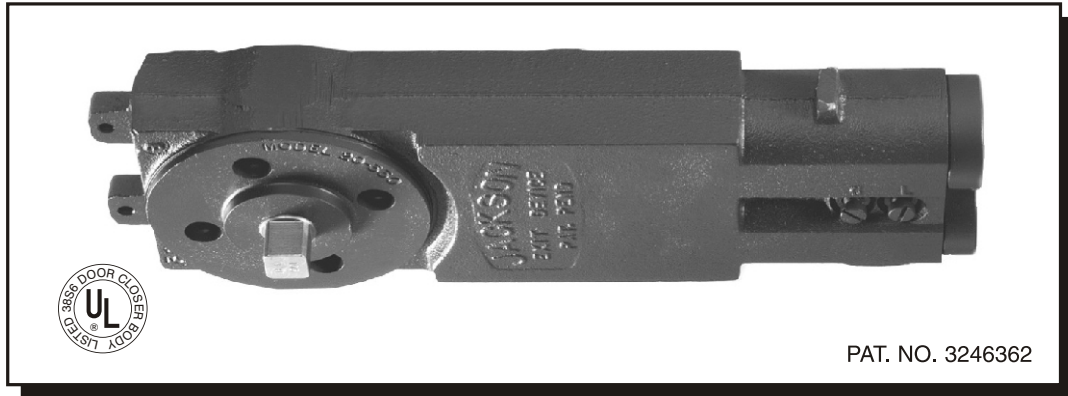

The Jackson 20-330 Series Overhead Concealed Closer has been the leader in the industry for over 35 years. The closer is manufactured in the U.S.A. under strict ISO 9001 guidelines and is designed to give long lasting, maintenance free performance. This closer is truly universal. One basic closer mechanism allows for single or double acting, center-hung or offset applications and is non-handed. Suitable for both interior and exterior installations, it provides complete door control in a compact and concealed design. Available in 4 fixed spring sizes or adjustable spring power, making this the ideal closer for aluminum, wood or hollow metal doors and frames.

TECHNICAL INFORMATION

DIMENSIONS: All Jackson 20-330 Series Overhead Closers are the same size and fit into a 1-3/4" x 4" (44.5 x 101.5 mm) header.

LENGTH: 11-5/8" (295 mm)

HEIGHT: 1-1/2" (38 mm)

WIDTH: 3-11/16" (94 mm)

WEIGHT: Mechanism Only 8 lbs. (3.6 kg)

Center-Hung Package . . . 10 lbs. (4.5 kg)

Offset Package 11 lbs. (5.0kg)

NOTE: Weights will vary depending on Package type

ACTION: Non-Handed Design
Single or Double Acting
Center-Hung or Offset Applications

WARRANTY: Guaranteed to be free from defects in materials and workmanship for 5 years from date of shipment.

ACCESSORIES: Complete selection of Arms, Pivots, Mounting Brackets and optional accessories.

OPTIONS:

• **EXTENDED LENGTH SPINDLE:**

Standard Spindle . . . 1/2" (13 mm)

Medium Spindle . . . 7/8" (22 mm)

Long Spindle . . . 1-13/64" (31 mm)

FEATURES:

• **DUAL VALVE CLOSING CONTROL** – Both sweep and latch speeds are independently adjustable.

• **FOUR FIXED SPRING SIZES:**

XLD = Extra Light Duty

LD = Light Duty

RD = Regular Duty

HD = Heavy Duty

NOTE: See the Closer Operational and Size Selector Charts on page A2 to determine proper closer size for the application.

• **ADJUSTABLE SPRING POWER** – Size XLD (2) thru RD (4)
This allows you to set an opening force which will meet Barrier-Free requirements for both interior and exterior doors in one closer.

• **90° or 105° Swing**

• **HOLD or NON-HOLD OPEN**

• **UL LISTED, MEETS UL288**

• **CUSHION BACKSTOP:** Provides cushion stop to protect both the closer and opening from damage.