
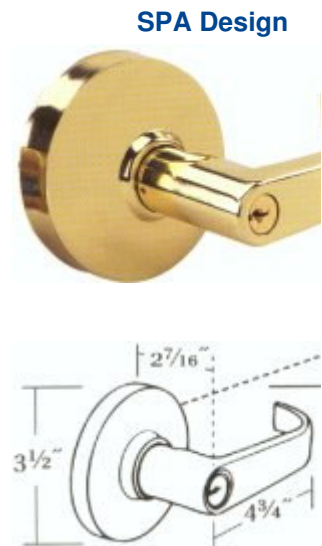
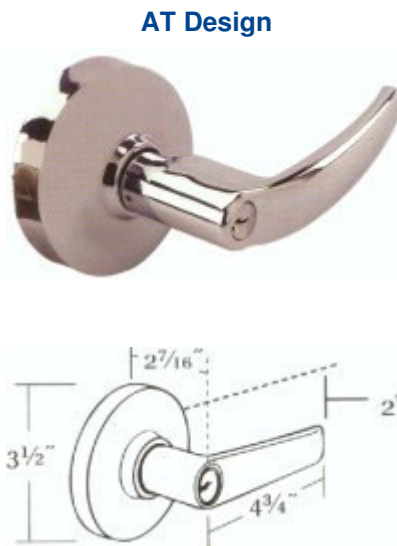


---

## Trim Selection

### Lever Design

- Non handed Grade 1 (Clutch Style)
- Cylindrical body hardened steel heavy duty tailpiece. For 1 3/4" and 2 1/4" doors. Prefix THI before part number for 1/4" door thickness. Available for fire and non fire rated rim and vertical rod exit devices.
- Rose diameter 3 1/3", lever length 4 3/4". Fits and covers 161 cutout.
- Finishes: US26D, US10B, US3, US4.

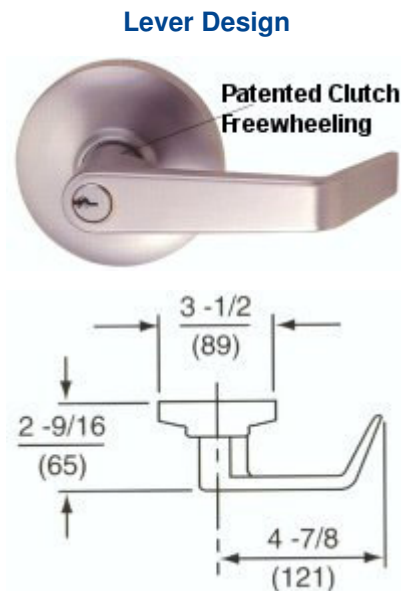

- **ENTOOL or ICENTOOL**
  - Entrance
    - Key retracts latchbolt, unlocks lever.
    - ANSI Function - 08
- **STRO5L or ICSTRO5I**
  - Storeroom
    - Key operates lever, otherwise always locked.
    - ANSI Function - 04
- **PAS30L**
  - Passage
    - Trim always operable and free
    - ANSI Function - 15
- **DUM40L**
  - Dummy
    - Dummy trim. One sided.
    - ANSI Function - 10



### Please Note

- When ordering "AT" and "SPA" designs, prefix design name before part number. Example: ENTOOL in "ATENTOOL".
- Keyway - Standard 6-pin "C" keyway. Also available in Schlage C-K, Russwin DI, Corbin 60, Sargent LA, Falcon/Weiser E, Arrow, Yale GA, Yale 8, Kwikset. Can also accept Medeco, Assa and Kaba high security

---

### Escutcheon Lever Design

- **Construction**
  - Grade 1, thrubolted design, clutch freewheeling. Non handed
  - Easily field reversible.
  - Hardened steel heavy duty tailpiece. Available for fire and non fire rated rim and vertical rod exit devices.
- **Finishes**

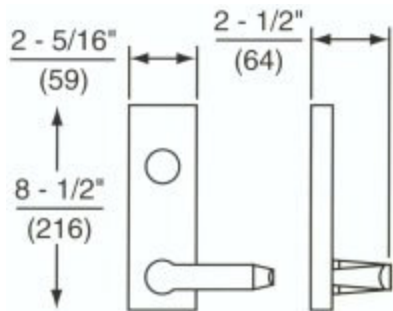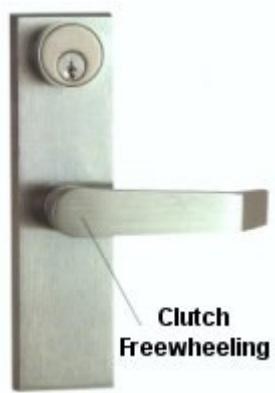

**Keyway** - Standard 6-pin "C" keyway. Also available in Schlage C-K, Russwin D!, Corbin 60, Sargent LA, Falcon/Weiser E, Arrow, Yale GA, Yale 8, Kwikset. Can also accept Medeco, Assa and Kaba high security cylinders.

- Powder coated aluminum (alum)
- Powder coated dark bronze duranodic (duro)
- Powder coated gold

#### ■ Door Thickness

- Standard 1 3/4". Prefix THI before part number for 2 1/4" door thickness.

#### ■ Escutcheon Dimensions

- 2 5/16" width x 8 1/2" length. Lever length: 4 3/4". Fits and covers 1/8" 161 cutout.

#### ■ ECS2200 or ICECS2200

- Entrance
  - Key locks or unlocks thumbpiece.
  - ANSI Function - 63

#### ■ ESC2205 or ICESC2205

- Storeroom
  - Key retracts latchbolt, otherwise always locked.
  - ANSI Function - 04

#### ■ ESC92230

- Passage
  - Trim always operable and free.
  - ANSI Function - 62

#### ■ ESE2240

- Dummy
  - Dummy trim. One sided.
  - ANSI Function - 10

## Pull Design

### 2200 NL or IC2200NL

- **For Rim Devices Only**
- Outside by pull and key.
- Key retracts latchbolt.
- ANSI function - 03
- Covers 161 cutout.



### 2200 DTP

- Outside by pull only.
- Pull when dogged.
- ANSI Function - 02
- Covers 161 cutout.



### 2200 EOP


- Outside by plate only.
- ANSI function - 10
- Covers 161 cutout.



## Thumbpiece Trim

### ■ THPOO or ICTHPOO

- Entrance
  - Key locks or unlocks thumbpiece.
  - ANSI Function - 63

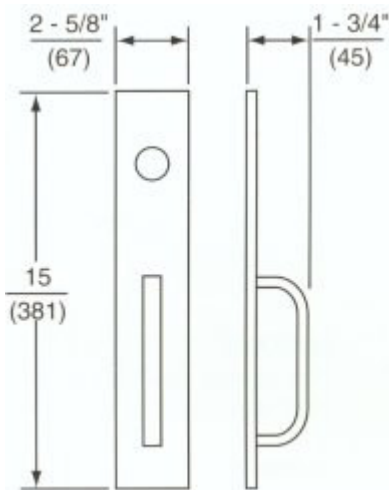

- **THPO5 or ICTHPO5**

- Storeroom
  - Key retracts latchbolt, otherwise always locked.
  - ANSI Function - 04

- **THP30**

- Passage
  - Trim always operable and free.
  - ANSI Function - 62

- **THP40**

- Dummy
  - Dummy trim. One sided.
  - ANSI Function - 10

- **Keyway**


- Standard 6-pin "C" keyway. Also available in Schlage C-K, R, D!, Corbin 60, Sargent LA, Falcon/Weiser E, Arrow, Yale GA, Kwikset. Can also accept Medeco, Assa and Kaba high security cylinders.

- **Finishes**

- Powder coated aluminum (alum), dark bronze duranodic (durc)

- **Door Thickness**

- Standard 1 3/4". Prefix **THI** before part number for 2-1/4 thick

**Note:**  Interchangeable Core - Interchangeable core locks will accept compatible 6 or 7 pin cores with Best, F Arrow. Indicated by "IC"