

2200 & F2200 Series Rim Type Exit Device

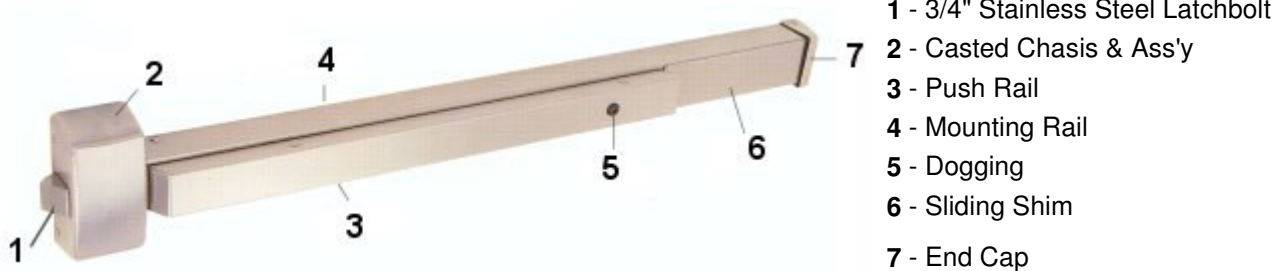

- 1 - 3/4" Stainless Steel Latchbolt
- 2 - Casted Chasis & Ass'y
- 3 - Push Rail
- 4 - Mounting Rail
- 5 - Dogging
- 6 - Sliding Shim
- 7 - End Cap

Specifications

- **For Doors**
 - 1-3/4" thick standard optional 2-1/4" thick. 4-1/2" minimum stile width required for single or double c application using standard 239 strike and pull or lever trims.
- **Chassis**
 - Nonferrous alloy (Panic Grade), steel (Fire Grade)
- **Cover**
 - Nonferrous alloy. Covers stock hollow metal doors with 161 cutout.
- **Mounting**
 - Furnished standard with wood and machine screws. Available with thru bolts on request.
- **End Cap**
 - Steel construction.
- **Alarm**
 - Available. See [Alarm Exit Hardware](#) section.
- **Hand**
 - Non handed, center hub.
- **Latch Bolt**
 - Stainless steel 3/4" throw.
- **Spring**
 - Stainless steel throughout.
- **ANSI Standard**
 - A156.3, Grade 1.
- **Rail Assembly**
 - Heavy gauge steel, painted.
- **Strike**
 - 239 packed standard (See [Strike](#) page).
- **Dogging Feature**
 - Allen-type key furnished standard on non-fire labeled devices. Cylinder dogging available.
- **Mullion**
 - Available.
- **UL and ULC Listed**
 - 2200 Series for panic. F2200 Series for fire exit hardware for all types of 4' x 8' single doors and 8' : doors for up to 3 hour fire labeled installations, conforms to standards UL10C and UBC 7-2-1997 co
- **Finish**
 - Aluminum (alum), dark bronze duranodic (duro), gold.
- **Door Size**

- 2200E036 and F2200E036 for 36" doors.
- 2220E048 and F2220E048 for 48" doors.

Dimensions


Touch bar height to finished floor	41" (1043mm) at center
Touchbar Projection Neutral Depressed	2-1/2" (64mm) 1-3/4" (45mm)
Center case	5-1/8" x 2-3/4" x 2" (129mm x 69mm x 52mm)
Device length Short 3' (914mm) Long 4' (1219mm)	2'9" to 3' (840mm to 914mm) door size 2'9" to 4' (1145mm to 1219mm) door size

Minimum Stile Requirements

4" escutcheon trims & 4-1/2" for thumbpiece and rose trims


DOUBLE DOOR

4-1/2" MIN. STILE

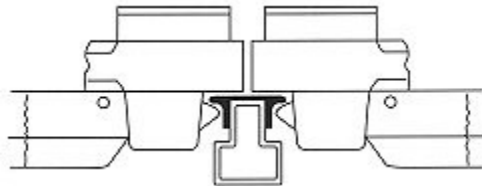

239 STRIKE

418 MULLION

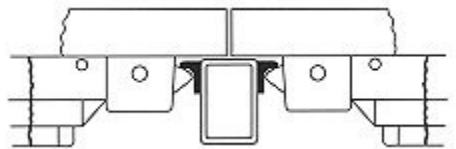

239 Strike

424 Mullion
4-5/8" Min. Stile.

SINGLE DOOR

4-1/2" MIN. STILE

