

2260 & F2260 Series Vertical Rod Type Exit Device

Specifications



- **For Doors**
 - 1-3/4" thick standard optional 2-1/4" thick. 3-3/4" minimum stile width required for single door application. 3-1/2" minimum stile width required for double door application. Lever trims available.
- **Chassis**
 - Nonferrous alloy (Panic Grade), steel (Fire Grade)
- **Cover**
 - Nonferrous alloy. Covers stock hollow metal doors with 161 cutout.
- **Mounting**
 - Furnished standard with wood and machine screws. Thru bolts are standard packaging on fire rated devices.
- **Alarm**
 - Available. Prefix "Alrm" before part #.
- **End Cap**
 - Steel construction.
- **Hand**
 - Easily field reversible. Specify at time of order LHRB, RHRB for convenience.
- **Latch Bolt, Spring**
 - Stainless steel.

- **ANSI Standard**
 - A156.3, Grade 1.
- **Rail Assembly**
 - Heavy gauge steel, painted.
- **Strike**
 - See [Strike](#) page.
- **Dogging Feature**
 - Allen-type key furnished standard on non-fire labeled devices.
- **UL and ULC Listed**
 - 2260 Series for panic. F2260 Series for fire exit hardware for all types of 8' x 8' double doors for up to 3 hour fire labeled installations, conforms to standards UL10C and UBC 7-2-1997 codes.
- **Finish**
 - Aluminum (alum), dark bronze duranodic (duro), gold..
- **Door Size**
 - 2260V3694 and F2260V3684 for 36" x 84" doors.
 - 2280V4896 and F2280V4896 for 48" x 96" doors.
 - 2290V3696 and F2290V3696 for 36" x 96" doors.
 - 2250V36120 for 36" x 120" doors.
 - 2240V48120 for 48" x 120" doors.


Dimensions

Touch bar height to finished floor	41" (1043mm) at center
Touchbar Projection	
Neutral	2-1/2" (64mm)
Depressed	1-3/4" (45mm)
Center case	5-1/8" x 2-3/4" x 2" (129mm x 69mm x 52mm)
Device length	

Short 3' (914mm) Long 4' (1219mm)	2'9" to 3' (840mm to 914mm) door size 2'9" to 4' (1145mm to 1219mm) door size
Panic Grade top & bottom latch case	3-15/16" x 2-1/8" x 1-3/8" (100mm x 52mm x 42mm)
Fire grade top latch case	3-15/16" x 2-11/16" x 2-1/16" (100mm x 68mm x 53mm)
Fire grade bottom latch case	3-15/16" x 2-1/8" x 1-3/8" (100mm x 52mm x 42mm)
Top and bottom rod length for 36" x 84" doors	Top rod 43-1/4" (1100mm), bottom rod 37-3/4" (960mm)
Top and bottom rod length for 48" x 96" doors	Top rod 53-1/16" (1350mm), bottom rod 37-3/4" (960mm)
Vertical rods	1/2" (13mm) Round tubing

Minimum Stile Requirements

DOUBLE DOOR - With Two Vertical Rod Type Exit Devices

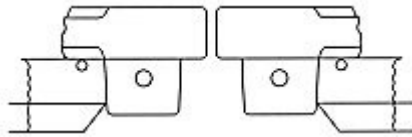

3-1/2" Min. Stile