




Providing Quality Service and Products Since 1983

[Home](#) [About Us](#) [Products](#) [Templates](#) [Terms](#) [Credit Application](#) [Contact](#)



CR441 Series Door Closer

[Documents](#) [Part Numbers and Descriptions](#)


[Click image at left to enlarge](#)

[Print Catalog Page](#)



25 Year Warranty / UL Listed

Conforms to Standards UL10C and UBC7-2-1997

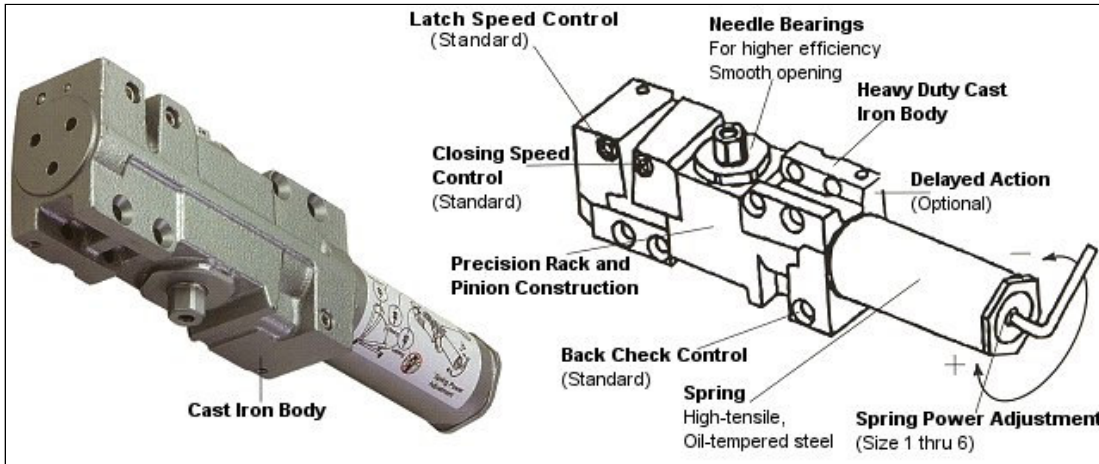

Features:

- Universal application. Non-handed for standard, top-jamb or parallel arm installation
- Non-sized, 1 thru 6. FACTORY PRESET SIZE 3 meets ADA
- Standard adjustable back check function
- Adjustable closing and latching speed by two separate regulating valves
- Optional adjustable delayed action (DA) Preset at the factory for approximately 20 seconds, between 70° and 0°. Delay time easily adjusted up to 1 minute. CR441 DA
- Standard full plastic cover
- Self tapping screws and closer gauge for easy adjustment is standard feature

Accessories:

- Parallel hold-open adjustable arm (Non-handed). CR3049HO
- Non-handed forged solid steel parallel arm for extra abusive installations. CR3077HDAR
- Optional, non-handed parallel arm features solid forged steel main arm and forearm with stop in softfit shoe. CR3077SPAS
- Optional non-handed parallel arm features solid forged steel main arm and forearm provides hold-open function with templated stop/hold-open points. Handle controls hold-open function. CR3049HOSRPS
- Drop plate used where top rail is less than 3 3/4". CR18
- Drop plate for top jamb where face is less than 3 1/2". CR18TJ
- Drop plate for top jamb mounted closer flush

Reduced Opening Force CR441 Door Closers:


IMPORTANT Any door closer, including those certified by BHMA to conform to ANSI Standard A156.4, that is chosen, installed and adjusted based on ADA or other reduced opening force requirement may not provide sufficient power to close and latch a door. Location of door could also affect action and efficiency of door closer.

| | Door Width | 36" | 42" | 48" |
|--|------------|-------|-------|-------|
| | **8.5 lbs. | CR441 | CR441 | CR441 |
| | **5.0 lbs. | CR441 | CR441 | CR441 |

** Maximum Opening Force

Table of Sizes:

Closing power of CR441 Series closers may be adjusted 50%.
 → Shows recommended range of door width for closer size.

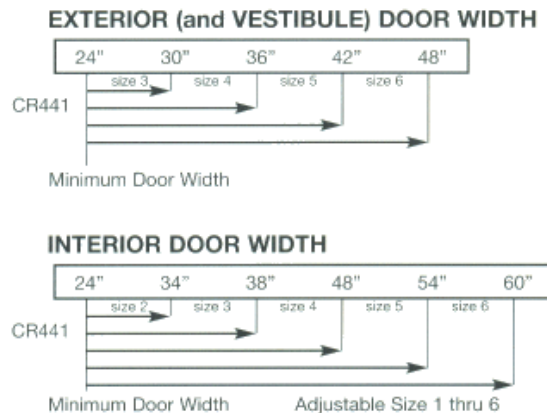


Specifications:

| Description | Size |
|------------------------------|------|
| A. Length of Closer Body | 11" |
| B. Horizontal Mounting Holes | 5" |

with top of head frame face in flush ceiling condition. Plate requires 1 3/4" minimum head frame. CR18G

- Drop plate for parallel arm mounting top rail is less than 5 1/2" measured from stop. Plate requires 2" minimum top rail. CR18PA
- Available in Alum, Duro, Gold, US3, 26 and other plated finishes
- Optional Metal cover.

| | | |
|----------------------------|--------|---|
| C. Vertical Mounting Holes | 1" |  |
| D. Width of Closer Body | 2 3/4" | |
| E. Projection from Door | 2" | |



Cross References

| CAL-ROYAL | LCN | DORMA | CORBIN | NORTON | RUSWIN | SARGENT | YALE |
|-----------|------|-----------------------|--------|--------|--------|---------|------|
| CR441 | 4041 | 7800FCOV/ 7600FCOV | DC2200 | 7500 | 2820K | 1230 | 4400 |

The data on this chart represents our judgment of which are most similar. Since no product is exactly alike the information has been obtained from trade sources. It is not guaranteed nor represented that any specific product exactly equals any other product. Door closer body size may be different.