

IN-STOCK

Cam Locks

disc tumbler multi application

FEATURES & BENEFITS:

- **Coming Soon:** 2 key pulls to allow for 90 and 180 degree key release
- Can be Masterkeyed
- Material: Pressure cast
- Regular Key Changes: 200 with key blank 5865JVR (5 disc), 700 with key blank 8658JVR (6 disc)
- Masterkeyed Key Changes: 180 with key blank 5860KS (5 disc), 700 with key blank 5861KS (6 disc)
- Cam Positions: Regularly furnished with cam mounted at 12 o'clock locked position. Cam may be mounted at 3, 6, 9, or 12 o'clock locked position.
- Cam Rotation: Regular rotation 90 degrees from 12 to 9 o'clock, key removable only in locked position at 12. Also available with 180 degree rotation from 12 to 6 o'clock so key can be withdrawn in both locked and unlocked positions.
- Cylinder: Slabbed on both sides



CCL Security Products offers multi-application single bitted Disc Tumbler Camlocks. These are diecast and can be Masterkeyed. All the locks are individually polybagged including a C2L straight cam and a C4L/C6L offset cam, the pronged washer, a 180 degree cam stop, and a collar ring.

CCL
Security Products™

301 West Hintz Road
Wheeling, IL 60090
Telephone: 800.733.8588
Fax: 847.537.1881
www.cclsecurity.com
A Proud Union Company. (S.E.I.U.)


IN-STOCK

Cam Locks

disc tumbler multi application

FEATURES & BENEFITS:

- **Coming Soon:** 2 key pulls to allow for 90 and 180 degree key release
- Can be Masterkeyed
- Material: Pressure cast
- Regular Key Changes: 200 with key blank 5865JVR (5 disc), 700 with key blank 8658JVR (6 disc)
- Masterkeyed Key Changes: 180 with key blank 5860KS (5 disc), 700 with key blank 5861KS (6 disc)
- Cam Positions: Regularly furnished with cam mounted at 12 o'clock locked position. Cam may be mounted at 3, 6, 9, or 12 o'clock locked position.
- Cam Rotation: Regular rotation 90 degrees from 12 to 9 o'clock, key removable only in locked position at 12. Also available with 180 degree rotation from 12 to 6 o'clock so key can be withdrawn in both locked and unlocked positions.
- Cylinder: Slabbed on both sides

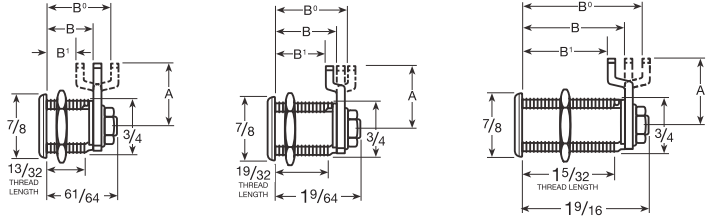

Part No/Cyl Length	Stock ID No.	MKYD	US4	US26D	Stock Qty.	Approx. Boxed Wt. (lbs./ oz.)
15751						
B15751 KD	00218	.	.	.	25	5/9
B15751 KA - CAT30	00219			.	25	5/9
B15751 CAT60	02656			.	25	5/9
B15751 MKY M8003(KD)	02654			.	25	5/9
B15751		.	.	.		
C15751		.	.	.		
15752		.	.	.		
B15752 KD	02645			.	25	5/9
B15752 KA - CAT30	02660			.	25	5/9
B15752 CAT60	02661			.	25	5/9
B15752 MKY M8003(KD)	02662	.	.	.	25	5/9
B15752		.	.	.		
15753		.	.	.		
15760		.	.	.		
B15760 KD	00220			.	25	5/9
B15760 KA - CAT30	02908			.	25	5/9
B15760 CAT60	02659			.	25	5/9
B15760 AUE1	02664			.	25	5/9
B15760 MKY M8003(KD)	02665			.	25	5/9
B15760		.	.	.		
K15760 Camlock, KD, Carded	00222			.	8	2/2
K15760A Camlock, KA-CAT30, Carded	00223			.	8	2/2
K15760 Carded			.	.		
K15760A KA - CAT30, Carded			.	.		

• Stock items are not shaded and are available in stock quantity units only. Use Stock ID No. when ordering stock items.
 • Made - To - Order items are shaded.

CAM NO.	LENGTH CAM A	DISTANCE UNDER HEAD TO CAM								
		B	15751			15752			15760	
		B	B'	B''	B	B'	B''	B	B'	B''
C2S	7/8"	5/8"			13/16"			1/4"		
C2L	1 1/4"	5/8"			13/16"			1/4"		
C3S	7/8"		1/2"			11/16"			1 1/8"	
C3L	1 1/4"		1/8"			11/16"			1 1/8"	
C4S	7/8"		3/8"			9/16"			1"	
C4L	1 1/4"		3/8"			9/16"			1"	
C5S	7/8"			3/4"			15/16"			1 3/8"
C5L	1 1/4"			3/4"			15/16"			1 3/8"
C6S	7/8"			7/8"			11/16"			1 1/2"
C6L	1 1/4"			7/8"			11/16"			1 1/2"



301 West Hintz Road
 Wheeling, IL 60090
 Telephone: 800.733.8588
 Fax: 847.537.1881
 www.cclsecurity.com
 A Proud Union Company. (S.E.I.U.)

