




OUTSIDE TRIM

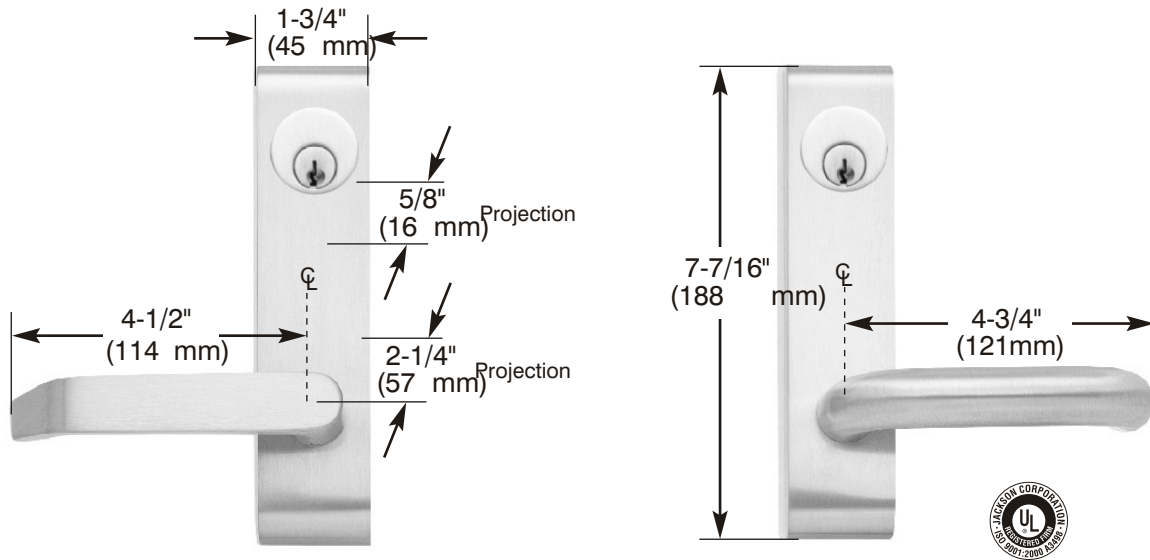

TECHNICAL INFORMATION

APPLICATIONS

- Key controlled outside trim is available for use with all Jackson Exit Devices. (**Excludes 1095**)
- Product is shipped for use with standard 1-3/4" (45mm) Thick Doors - 2" (51mm) Door Mounting is optional.

FEATURES

- Uses standard cylinder (Supplied by Others)
 - CVR Device: 1" (25mm) Mortise cylinder with MS type cam.
 - Rim Devices: 1" (25mm) Mortise cylinder with MS type cam.
- Non-Handed
- Thru-bolted with machine screws
- Available Trim Configuration:
 - Lever - Flat Style
 - Lever - Rounded
 - Matching Inactive Dummy Trim
- Electrified Trim (24 Volts, AC/DC)

MATERIALS

Escutcheon..... Extruded Aluminum
 Lever Aluminum
 Mechanical Components..... Plated Hardened Steel

FINISH

Standard Finished:
 DBZ 313 - Anodized Dark Bronze
 US28/628 - Anodized Satin Aluminum